




EPVC

Expanded PVC (EPVC) is a lightweight, yet rigid, expanded foam polyvinyl chloride making it tough and versatile for many of today's graphic display applications. EPVC can be sawed, drilled, bent and fabricated using ordinary tools and fasteners. EPVC can be used for interior applications and some limited exterior applications (Thicker gauges are recommended).

Substrate Type	Trade Names	Sheet Construction	Applications	Why Choose This Material	Fabrication	Outdoor Use
Expanded PVC	Sintra Celtic Komatex Foamalite Higher Density Versions: -Intecel -Komacel	Moderately expanded rigid PVC homogeneous sheet with a lowgloss matte finish	POP displays Exhibits and Kiosks Framing - archival Interior Signage Exterior Signage	Lightweight, rigid and durable Chemical and moisture resistant Dent and scratch resistant Easily fabricated with wood and foam techniques	Mounting Direct Digital Printing I-Cut Routing Die cutting - Punching	Good for temporary outdoor use. Excellent for indoor use.

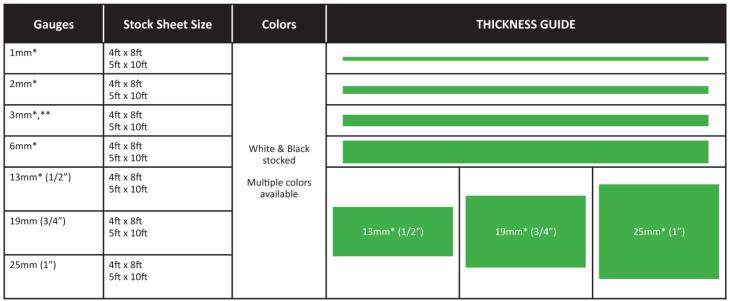

^{*}Normally stocked

EPVC can be rendered flexible at temperatures as low as 150° F, allowing for molding and shaping. EPVC is usually considered to be half the weight of regular PVC materials while still maintaining good structural rigidity.

All statements, technical information and recommendations about Vision Graphics substrates are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Vision Graphics products are sold with the understanding that the purchaser has independently assumed responsibility in determining the suitability of such product for its purposes. +1/-2 variance is allowed on all specs.

It is the responsibility of purchasers to independently verify, prior to use, the suitability of the products for their specific applications and print methods. SBR/Vision Graphics cannot be held liable for any misuse, damage or losses as specified in its product warranty. Subject to change without notice.